




SIRCOVER ATS Bypass

Manually operated Transfer Switching Equipment
from 125 to 1600 A

Transfer switches

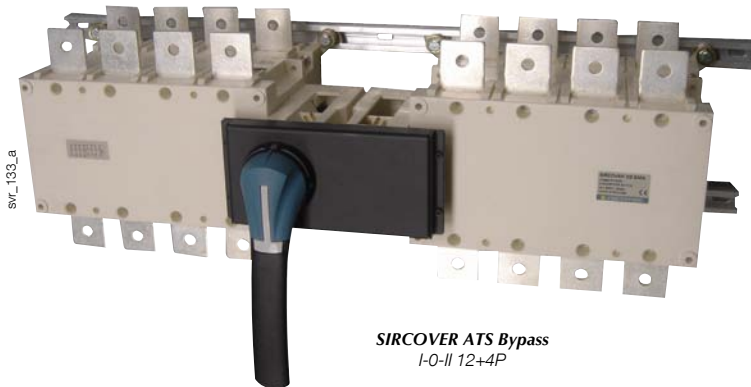

SIRCOVER ATS Bypass
I-O-II 12+4P

The solution for

- > Industry
- > Healthcare buildings



Strong points

- > Stable positions
- > On-load switching
- > Secured breaking
- > A complete solution

Conformity to standards

- > IEC 60947-3



Function

SIRCOVER ATS Bypass switches are manual 12 + 4 pole transfer switches with positive break indication. They are designed to isolate ATS type electrical equipment (automatic transfer switch) or UPS, with minimum interruption to the load supply. Integrating a SOCOMEC transfer switch into the installation enables source selection when in Bypass (see operating principle below).

Advantages

Stable positions

SIRCOVER ATS Bypass switches have 3 stable positions which are not affected by voltage fluctuations or vibrations.

On-load switching

Thanks to its AC-22 characteristics, tested in accordance with standard IEC 60947-3, the SIRCOVER ATS Bypass enables on-load switching.


Secured breaking

Simultaneous upstream and downstream isolation with positive break indication.

A complete solution

The SIRCOVER ATS Bypass is a single product offering a genuine solution incorporating both an equipment isolation function and a switching function.

Operating principle

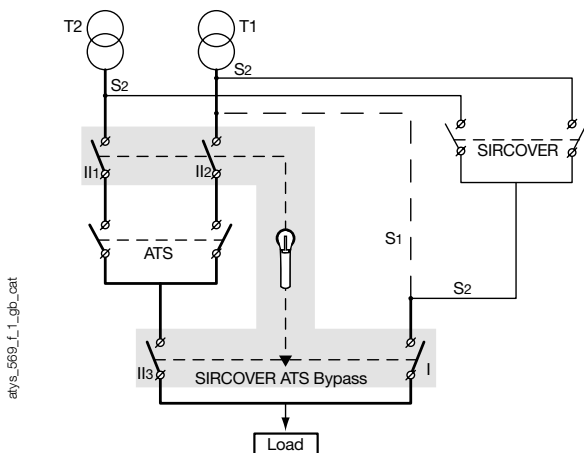

In the Bypass position:

- S1 - Single Line Bypass (without SIRCOVER):
The load is supplied directly by one of the two power sources (transformer T1 for example).
- S2 - Double Line Bypass (with SIRCOVER):
The supply source can be selected.

References

Rating (A)/ Frame size	No. of poles	Switch body	Direct handle	External handle	Shaft for external handle	Bridging bars	Auxiliary contact	Terminal shrouds	Terminal screens
125 A/B3	12 + 4 P	4100 9813	S3 type Black IP65 I - O - II 1433 3113	S3 type Black IP65 I - O - II 1433 3113	200 mm 1401 1520	4 P 4109 4019	1 st contact NO/NC included 2 nd contact NO/NC 4109 0021 ⁽¹⁾	4 P 2694 4014 ⁽²⁾⁽³⁾	4 P 1509 4012 ⁽⁴⁾
160 A/B3	12 + 4 P	4100 9816				4 P 4109 4025		4 P 2694 4021 ⁽²⁾⁽³⁾	4 P 1509 4025 ⁽⁴⁾
250 A/B4	12 + 4 P	4100 9825				4 P 4109 4039		4 P 2694 4051 ⁽²⁾⁽³⁾	4 P 1509 4025 ⁽⁴⁾
400 A/B4	12 + 4 P	4100 9840				4 P 4109 4063		4 P 2694 4051 ⁽²⁾⁽³⁾	4 P 1509 4063 ⁽⁴⁾
630 A/B5	12 + 4 P	4100 9863				Black 2799 7062		Black IP65 I - O - II 2799 7147	Included with the external handle
800 A/B6	12 + 4 P	4100 9880	4 P 4109 4160						
1000 A/B6	12 + 4 P	4100 9881							
1250 A/B7	12 + 4 P	4100 9882							
1600 A/B7	12 + 4 P	4100 9886							

(1) 2 contacts supplied: one for position I and one for position II.

(2) To fully shroud the front and rear at the, top and bottom, order quantity 8.

(3) To shroud only the front at the top and bottom, order quantity 4.

(4) For complete front protection, order the reference twice.

Accessories

Key handle interlocking system

Locking in position 0 with RONIS EL11AP (lock not supplied)				
Rating (A)	Frame size	Operation	Figure	Reference
125 ... 630	B3 ... B5	direct	1	4109 1006 ⁽¹⁾
125 ... 630	B3 ... B5	external	3	1499 7701
800 ... 1600	B6 ... B7	direct and external	2	consult us

(1) Specific handle included.

Locking in positions I, O, II with RONIS EL11AP (lock not supplied)				
Rating (A)	Frame size	Operation	Figure	Reference
125 ... 630	B3 ... B5	direct	1	4109 1002 ⁽¹⁾
800 ... 1600	B6 ... B7	direct	2	consult us

(1) Specific handle included.

Locking with CASTELL K type lock (lock not supplied)				
Rating (A)	Frame size	Operation	Figure	Reference
125 ... 630	B3 ... B5	external	3	1499 7702
800 ... 1600	B6 ... B7	external		consult us




Fig. 1



Fig. 2




Fig. 3

access_001_a_1_x_cat

access_102_a_1_x_cat

access_106_a_1_x_cat

SIRCOVER ATS Bypass

Manually operated Transfer Switching Equipment
from 125 to 1600 A

Characteristics according to IEC 60947-3

125 to 1600 A

Thermal current I_{th} at 40°C	125 A	160 A	250 A	400 A	630 A	800 A	1000 A	1250 A	1600 A
Frame size	B3	B3	B4	B4	B5	B6	B6	B7	B7
Rated insulation voltage U_i (V)	800	800	800	800	1000	1000	1000	1000	1000
Rated impulse withstand voltage U_{imp} (kV)	8	8	8	8	12	12	12	12	12

Rated operational currents I_e (A)

Rated voltage	Utilisation category	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾
415 VAC	AC-20 A / AC-20 B	125/125	160/160	250/250	400/400	630/630	800/800	1000/1000	1250/1250	1600/1600
415 VAC	AC-21 A / AC-21 B	125/125	160/160	250/250	400/400	630/630	800/800	1000/1000	1250/1250	1600/1600
415 VAC	AC-22 A / AC-22 B	125/125	160/160	250/250	400/400	630/630	800/800	1000/1000	1250/1250	1600/1600
415 VAC	AC-23 A / AC-23 B	125/125	160/160	250/250	250/250	500/500	800/800	1000/1000	1250/1250	1250/1250
690 VAC ⁽²⁾	AC-20 A / AC-20 B	125/125	160/160	250/250	400/400	630/630	800/800	1000/1000	1250/1250	1600/1600
690 VAC ⁽²⁾	AC-21 A / AC-21 B	125/125	160/160	200/250	200/250	500/500	800/800	800/800	800/800	1000/1000
690 VAC ⁽²⁾	AC-22 A / AC-22 B	125/125	125/125	125/160	125/160	315/315	800/800	800/800	800/800	1000/1000
690 VAC ⁽²⁾	AC-23 A / AC-23 B	63/80	63/80	100/125	100/125	160/200	200/250	200/250	200/250	500/500
220 VDC	DC-20 A / DC-20 B	125/125	160/160	250/250	400/400	630/630	800/800	1000/1000	1250/1250	1600/1600
220 VDC	DC-21 A / DC-21 B	125/125	160/160	250/250	250/250	630/630	800/800	1000/1000	1250/1250	1250/1250
220 VDC	DC-22 A / DC-22 B	125/125	160/160	250/250	250/250	500/500	800/800	1000/1000	1250/1250	1250/1250
220 VDC	DC-23 A / DC-23 B	125/125	125/125	200/200	200/200	500/500	800/800	1000/1000	1250/1250	1250/1250
440 VDC	DC-20 A / DC-20 B	125/125	160/160	250/250	400/400	630/630	800/800	1000 ⁽⁴⁾ /1000 ⁽⁴⁾	1250/1250	1600/1600
440 VDC	DC-21 A / DC-21 B	125 ⁽³⁾ /125 ⁽³⁾	125 ⁽³⁾ /125 ⁽³⁾	200 ⁽³⁾ /200 ⁽³⁾	200 ⁽³⁾ /200 ⁽³⁾	500 ⁽³⁾ /500 ⁽³⁾	800 ⁽⁴⁾ /800 ⁽⁴⁾	1000 ⁽⁴⁾ /1000 ⁽⁴⁾	1250 ⁽⁴⁾ /1250 ⁽⁴⁾	1250 ⁽⁴⁾ /1250 ⁽⁴⁾
440 VDC	DC-22 A / DC-22 B	125 ⁽³⁾ /125 ⁽³⁾	125 ⁽³⁾ /125 ⁽³⁾	200 ⁽³⁾ /200 ⁽³⁾	200 ⁽³⁾ /200 ⁽³⁾	500 ⁽³⁾ /500 ⁽³⁾	800 ⁽⁴⁾ /800 ⁽⁴⁾	1000 ⁽⁴⁾ /1000 ⁽⁴⁾	1250 ⁽⁴⁾ /1250 ⁽⁴⁾	1250 ⁽⁴⁾ /1250 ⁽⁴⁾
440 VDC	DC-23 A / DC-23 B	125 ⁽⁴⁾ /125 ⁽⁴⁾	125 ⁽⁴⁾ /125 ⁽⁴⁾	200 ⁽⁴⁾ /200 ⁽⁴⁾	200 ⁽⁴⁾ /200 ⁽⁴⁾	500 ⁽⁴⁾ /500 ⁽⁴⁾	800 ⁽⁴⁾ /800 ⁽⁴⁾	1000 ⁽⁴⁾ /1000 ⁽⁴⁾	1250 ⁽⁴⁾ /1250 ⁽⁴⁾	1250 ⁽⁴⁾ /1250 ⁽⁴⁾

Operational power in AC-23 (kW)

At 400 VAC without pre-break in AC ⁽¹⁾⁽⁵⁾	63/63	80/80	132/132	132/132	280/280	450/450	710/710	710/710	710/710
At 690 VAC without pre-break in AC ⁽¹⁾⁽⁵⁾	55/75	55/75	90/110	90/110	150/185	185/220	185/220	185/220	475/475

Reactive power (kvar)

At 400 VAC ⁽⁵⁾	55	75	115	185	290	365	575	575	
---------------------------	----	----	-----	-----	-----	-----	-----	-----	--

Fuse protected short-circuit withstand (kA rms prospective)

Prospective short-circuit (kA rms) ⁽⁶⁾	100	100	50	18	70	50	100	100	100
Associated fuse rating (A) ⁽⁶⁾	125	160	250	400	630	800	1000	1250	2 x 800

Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s⁽⁷⁾

Rated short-time withstand current 0.3s I_{sc} (kA rms)	15	15	17	17	25	50	65	65	100
---	----	----	----	----	----	----	----	----	-----

Short-circuit capacity (without protection)

Rated short-time withstand current 1s I_{sc} (kA rms)	8	8	9	9	14	27	36	36	50
Rated short-circuit making capacity								75	75

Connection

Minimum Cu cable cross-section (mm ²)	35	50	95	185	2 x 150	2 x 185			
Minimum Cu busbar cross-section (mm ²)					2 x 30 x 5	2 x 40 x 5	2 x 60 x 5	2 x 60 x 5	2 x 80 x 5
Maximum Cu cable cross-section (mm ²)		50	95	150	240	2 x 300	2 x 300	2 x 300	4 x 185
Maximum Cu busbar width (mm)	25	25	32	32	50	63	63	63	100
Tightening torque min (Nm)	9	9	20	20	20	20	20	20	40

Mechanical characteristics

Durability (number of operating cycles)	10000	10000	10000	10000	5000	3000	3000	3000	3000
Weight of 3 P switch (kg)	8.3	8.3	10	10.3	20.7	44.3	45.4	46.4	54.7
Weight of 4 P switch (kg)	10.6	10.6	11.7	12.4	24.8	53	54.4	55.8	67.3


- (1) Category with index A = frequent operation
Category with index B = infrequent operation.
(2) With terminal shrouds.
(3) 3-pole device with 2 poles in series for the "+" and 1 pole for the "-".

- (4) 4-pole device with 2 poles in series per polarity.
(5) The power value is given for information only, the current values vary from one manufacturer to another.
(6) For a rated operational voltage $U_n = 400$ VAC.

- (7) Value for coordination with any circuit breaker that ensures tripping in less than 0.3s. For coordination with specific circuit-breaker references, higher short-circuit current values are available. Please consult us.


Connection terminals

800 to 1000 A / B6



svr_077_a_1_x_cat

1250 to 1600 A / B7




svr_098_a_1_x_cat


Dimensions

125 to 630 A / B3 to B5

Direct front operation

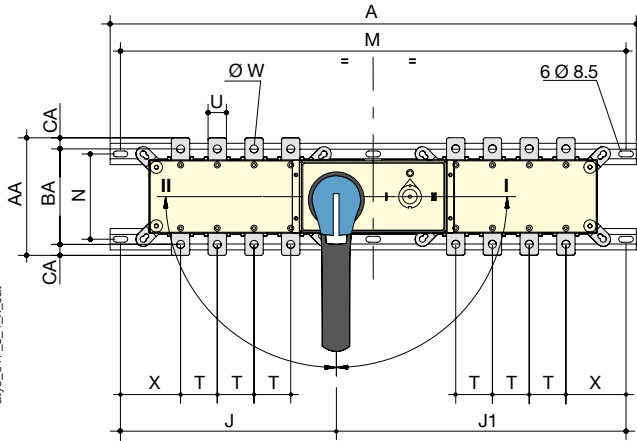

External front operation

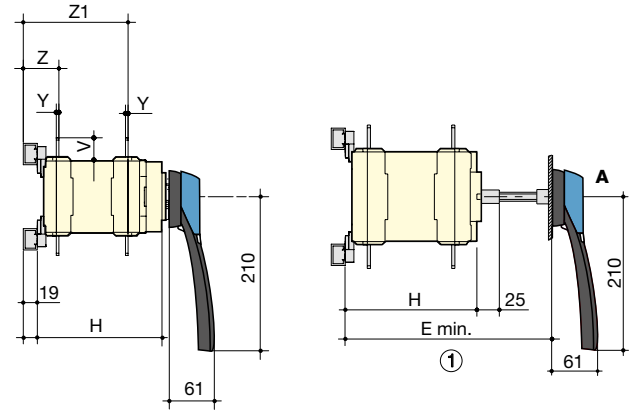


A. S3 type handle for external front operation: 125 to 630 A.
 1. Max length with shaft extension: E min + 50 mm.


Rating (A)/ Frame size	Overall dimensions		Switch body			Switch mounting			Connection									
	A 8p.	E min	H	J 8p.	J1 8p.	M 8p.	N	T	U	V	W	X 8p.	Y	Z	Z1	AA	BA	CA
125/B3	610	260±1	193	238	338	576	101	36	20	25	8.5	76	3.5	47	143	135	115	10
160/B3	610	260±1	193	238	338	576	101	36	20	25	8.5	76	3.5	47	143	135	115	10
250/B4	725	260±1	193	295	396	691	116	50	25	30	11	83.5	3.5	49	143	160	130	10
400/B4	725	260±1	193	295	396	691	116	50	35	35	11	83.5	3.5	49	143	170	140	15
630/B5	850	337±1	270	358	458	816	176	65	45	50	13	91.5	5	62	199	235	220	20

800 to 1600 A / B6 to B7

Direct front operation

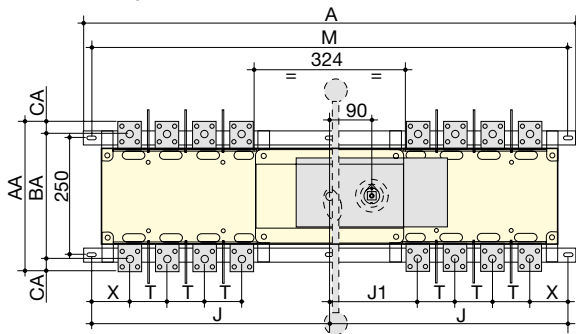


External front operation

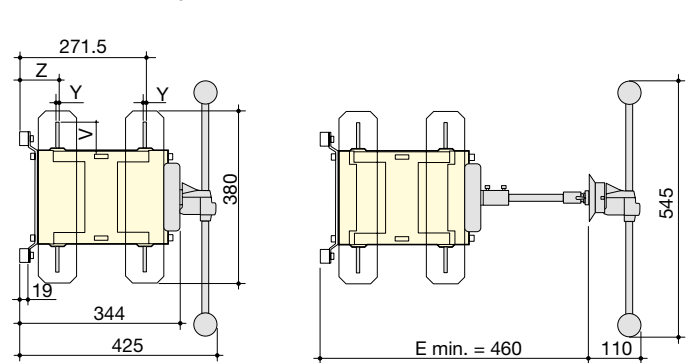

Rating (A)/ Frame size	Overall dimensions		Switch body			Switch mounting			Connection					
	A 8p.	J 8p.	J1 8p.	M 8p.	T	V	X 8p.	Y	Z	AA	BA	CA		
800/B6	1 055	510.5	189	1 021	80	60.5	81.5	7	84.5	321	268	26.5		
1000/B6	1 055	510.5	189	1 021	80	60.5	81.5	7	84.5	321	268	26.5		
1250/B7	1 320	643	195	1 286	120	44	88	8	85.5	288	258	15		
1600/B7	1 320	643	195	1 286	120	44	88	8	85.5	288	258	15		

Dimensions for external handles

125 to 630 A / B3 to B5

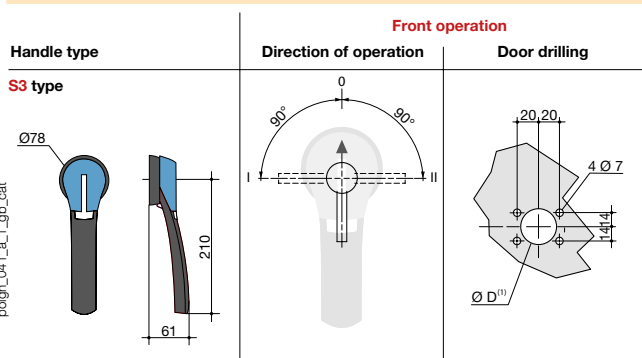

800 to 1600 A / B6 to B7

